

FA - MP 6

Pole mounting fiber optic distribution boxes for the implementation of subscriber branches.



FA-MP6


features:

- uncut tubes can be inserted,
- UV resistance,
- possibility of mounting an optical coupler in a mini-box housing,
- tilting fiber optic cassette for 24 splices,
- space for 16 subscriber cables,
- wall and pole mounting.

standards/certificates:

- PN-EN 60529:2003
- RoHS 2002/95/WE
- UL-94-V0

sectors:

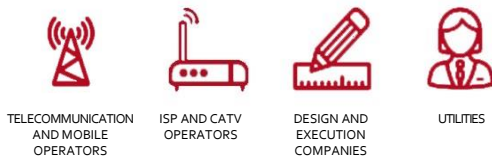

technical specifications:

FA-MP6	
dimensions [width x height x depth][mm]	246 x 219 x 85
switching field capacity	16 x SC/APC
max. number of splices	24
number of cable ports	16x12mm + 2x13,5mm
color	gray